SUNNY STEELNOVA Sumflower Sumflower





Designed, developed and assembled in Steelnova's factories in order to guarantee maximum quality.

The only components purchased externally remain the cutting system and the transmission which are however produced by European companies known for performance and experience.



The new geometry of the sides allows it to penetrate the product without tearing it and eliminates the classic accumulation of product on external parts of the header. Unlike the competitors, Sunny presents a total protection that ensures three aspects that are primaries for us:

Maximum Yield

Prevents spillage of the product by eliminating losses during the harvest.


Maximum Efficiency

Prevents the entry of external elements improving the quality of the product.

Maximum Safety

Protects the operator from possible fall between rotating parts.




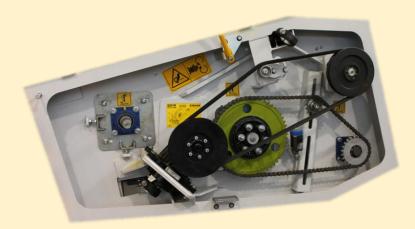



Flexible tensioners and constant lubrication minimize wear and friction on the chains; furthermore all the shafts are composed by hardened steel and supported by self-aligning bearings.

Adjustment plates allows perfect positioning of the auger and reel.

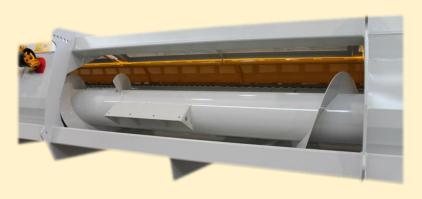



The width of the channel and the spiral that ends a few centimeters from the pickup bars provides for the fast and homogeneous feeding of the machine.
Sunny is compatible with any type of combine thanks to the coupling flanges,
which qualify to tilt the header obtaining the best collection set-up.
The transmission takes place through a series of cardan shafts which provides for
the alignment of the whole combine arch, reducing vibrations and extending the
life of the header.





Models:	Cutting Lenght:	Optionals :	Compatibility:
SUNNY - 610	5,8 mt.	Trinciastocchi	All kind of combine.
SUNNY - 770	7,4 mt.	Trinciastocchi	All kind of combine.
SUNNY - 980	9,5 mt.	Trinciastocchi	All kind of combine.

